


姿図

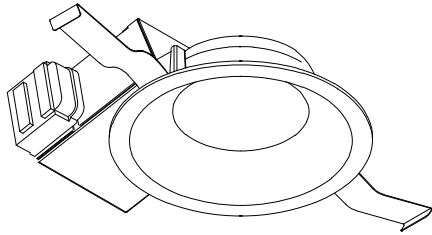

品番	DDL-4809FB
光源	LED 8.4W (5000K/3500K/2700K)
定格光束	580.0 lm
1/2照度角	63°
ビーム角	88°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 1.23 H
	B 1.23 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井				70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床				20			20			20			0
室指数	照 明 率 ( × 0.01 )													
0.6	58	51	46	58	51	46	56	50	46	55	50	46	44	
0.8	69	61	56	68	61	56	66	60	56	65	59	55	53	
1	77	70	65	76	69	65	74	68	64	72	67	63	61	
1.25	84	78	73	83	77	72	81	76	72	79	74	71	68	
1.5	90	83	79	88	83	78	86	81	77	83	79	76	73	
2	97	92	88	95	91	87	92	88	85	90	86	84	80	
2.5	101	97	93	100	96	92	96	93	90	93	91	88	85	
3	105	101	97	103	99	96	99	96	94	96	94	92	88	
4	108	105	102	106	103	101	102	100	98	99	97	95	91	
5	110	107	105	108	105	103	104	102	100	100	98	97	92	

