


姿図

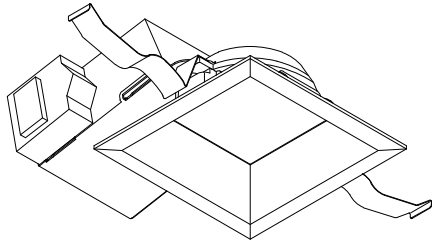

品番	DDL-4812FW
光源	LED 5.8W (5000K/3500K/2700K)
定格光束	400.0 lm
1/2照度角	62°
ビーム角	90°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 1.20 H
	B 1.20 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井		80			70			50			30			0
	壁	床	50	30	10	50	30	10	50	30	10	50	30	10	0
			20		20			20			20			0	
室指数	照 明 率 ( × 0.01 )														
0.6	54	46	41	53	46	41	52	46	41	51	45	41	39		
0.8	64	57	51	64	56	51	62	55	51	60	55	50	48		
1	73	65	60	72	65	59	70	63	59	68	62	58	56		
1.25	80	73	68	79	72	67	77	71	66	75	70	66	63		
1.5	86	79	74	85	78	73	82	77	72	79	75	71	68		
2	94	88	83	92	87	83	89	85	81	86	83	79	76		
2.5	99	94	90	97	92	89	94	90	87	91	87	85	81		
3	102	98	94	100	96	93	97	94	91	94	91	89	85		
4	106	103	100	104	101	98	100	98	95	97	95	93	88		
5	109	106	103	107	104	101	102	100	98	99	97	95	91		

