


姿図

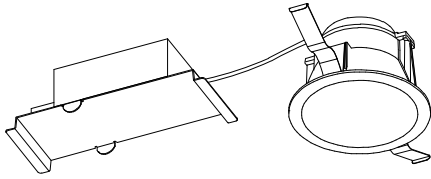

品番	DDL-4814FW
光源	LED 8.4W (5000K/3500K/2700K)
定格光束	570.0 lm
1/2照度角	48°
ビーム角	60°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.89 H B 0.89 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数	照 明 率 (× 0.01)													
0.6	67	61	57	67	61	57	66	61	57	65	60	57	55	
0.8	75	69	65	75	69	64	73	68	64	72	67	63	62	
1	82	76	71	81	75	71	79	74	70	78	73	70	68	
1.25	88	82	78	87	81	77	85	80	76	83	79	75	73	
1.5	92	87	83	91	86	82	89	84	81	86	83	80	77	
2	99	94	90	97	93	89	94	91	88	92	89	86	83	
2.5	103	99	96	101	98	94	98	95	92	95	93	90	87	
3	106	103	100	104	101	98	101	98	96	98	95	94	90	
4	109	107	104	107	105	103	104	102	100	100	98	97	93	
5	111	109	107	109	107	105	105	104	102	102	100	99	94	

