


姿図

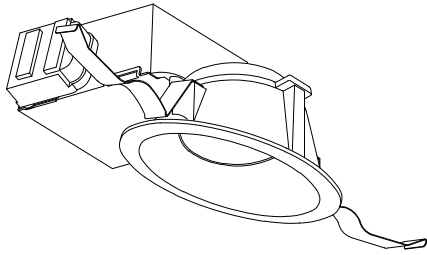

品番	DDL-4815FW
光源	LED 5.8W (5000K/3500K/2700K)
定格光束	400.0 lm
1/2照度角	(A37° A' 24°) B-B' 61°
ビーム角	(A53° A' 33°) B-B' 86°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A *** H B 1.18 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	80				70			50			30			0		
	天井	壁	壁	床	天井	壁	壁	床	天井	壁	壁	床	天井	壁	壁	床
	50	30	10	20	50	30	10	20	50	30	10	20	50	30	10	20
室指数	照 明 率 (× 0.01)															
0.6	57	49	44	56	49	44	55	48	44	54	48	44	42			
0.8	67	59	54	66	59	54	64	58	54	63	57	53	51			
1	75	68	62	74	67	62	72	66	62	70	65	61	59			
1.25	82	76	70	81	75	70	79	73	69	77	72	68	66			
1.5	88	81	76	86	80	76	84	79	75	81	77	74	71			
2	95	90	85	94	89	85	91	87	83	88	84	81	78			
2.5	100	95	91	98	94	90	95	91	88	92	89	86	83			
3	103	99	96	101	98	94	98	95	92	95	92	90	86			
4	107	104	101	105	102	99	101	99	96	98	96	94	89			
5	109	106	104	107	104	102	103	101	99	99	98	96	91			

