


姿図

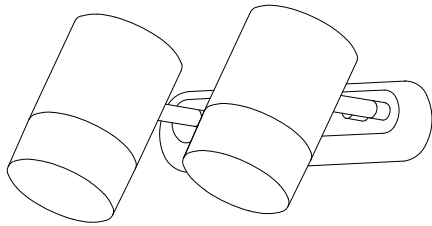

品番	DSL-4988FW_1灯
光源	LED 8.4W 5000K-3500K-2700K
定格光束	700.0 lm
1/2照度角	64°
ビーム角	88°

器具効率	100.0 %
上方光束	11.2 %
下方光束	88.8 %
器具間隔 最大限 (取付高さH)	A 1.25 H B 1.25 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井			壁			50			30			0		
	80	70	50	50	30	10	50	30	10	50	30	10	50	30	10
床	20			20			20			20			0		
室指数	照 明 率 (× 0.01)														
0.6	49	42	36	48	41	36	46	40	35	44	39	34	32		
0.8	59	50	45	57	50	44	54	48	43	52	46	42	38		
1	66	58	52	64	57	51	61	54	50	58	52	48	44		
1.25	73	65	59	71	64	58	67	61	56	64	58	54	50		
1.5	78	71	65	76	69	63	72	66	61	68	63	59	54		
2	86	79	73	83	77	72	78	73	69	74	70	66	61		
2.5	91	85	80	88	83	78	83	78	74	78	74	71	65		
3	95	89	84	92	87	82	86	82	78	81	78	75	69		
4	99	94	90	96	92	88	90	87	83	84	82	79	73		
5	102	98	94	99	95	92	92	90	87	87	84	82	75		

