




姿図



品番	DSL-4989FW
光源	LED 8.4W 5000K-3500K-2700K
定格光束	540.0 lm
1/2照度角	61°
ビーム角	82°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 1.18 H
	B 1.18 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数	照 明 率 (× 0.01)													
0.6	59	52	47	58	52	47	57	51	47	56	51	47	45	
0.8	68	61	56	68	61	56	66	60	55	65	59	55	53	
1	76	69	64	75	69	64	73	68	63	71	66	63	60	
1.25	83	77	72	82	76	71	80	74	70	78	73	69	67	
1.5	88	82	77	87	81	77	84	79	75	82	78	74	72	
2	96	90	86	94	89	85	91	87	84	88	85	82	79	
2.5	100	96	92	99	94	91	95	92	89	92	89	87	83	
3	104	100	96	102	98	95	98	95	93	95	93	90	86	
4	107	104	101	105	102	100	101	99	97	98	96	94	90	
5	110	107	104	107	105	103	103	101	99	100	98	96	92	

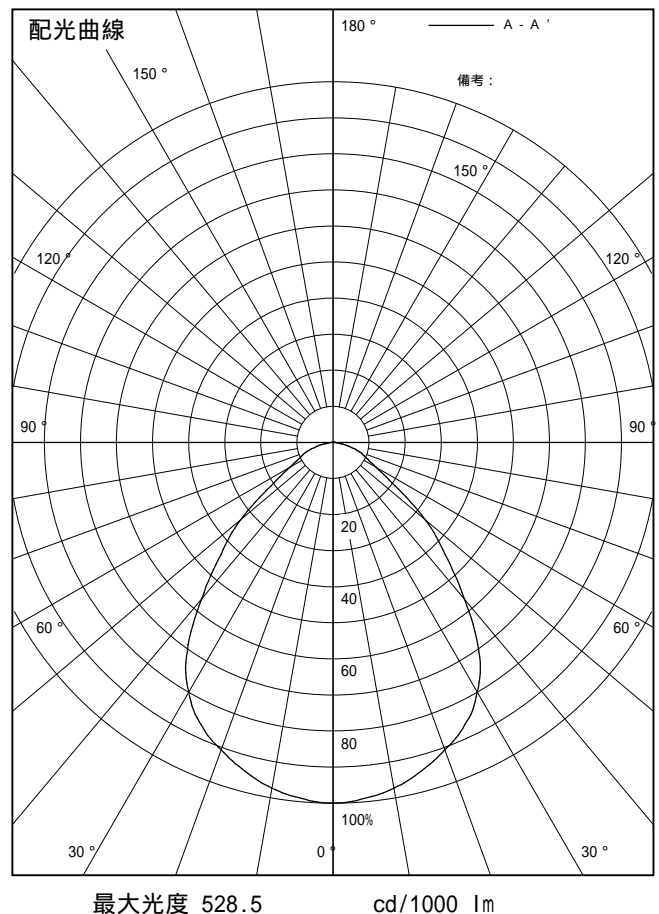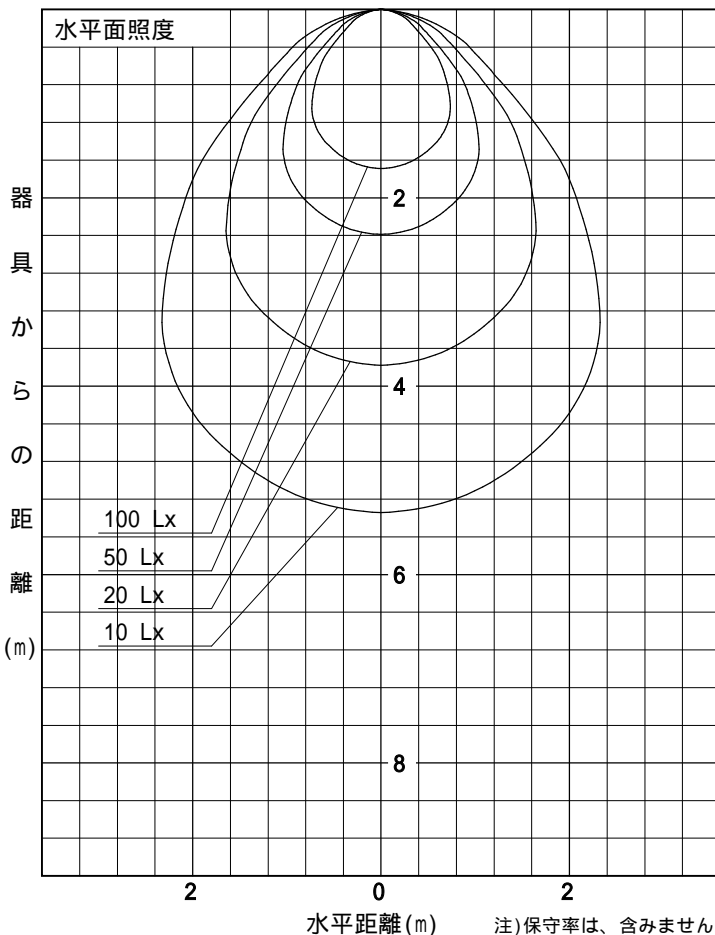

注)保守率は、含みません。