

Specification Sheet




Luminaire Type : Adjustable Downlight

Model Code : LLD-7087AUM 3500K
 LLD-7087AUM 2700K
 LLD-7087AUM 3000K




Technical Data

Dimension : D.115/H.153mm
Weight : 1.0 Kg
Light source : LED
Wattage : 13.7W
Lumen : 610Lm(3500K)/580Lm(2700K)
 600Lm(3000K)
Color temperature : 3500 K
Beam angle : 16°
CRI : 83
Protection Class(IP) : IP44

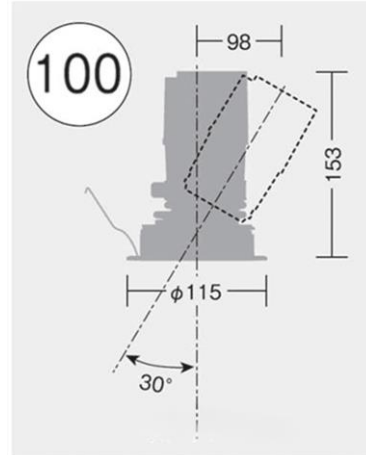

Component & Information

Aluminum die-casting trim, marine-grade painting with stainless color
 Aluminum die-casting heatsink, Stainless steel fixture
 Silicon accordion black gasket, Plastic cone chrome plating
 Optical control lens, Tempered glass cover, clear
 *Glare cut-off angle: 35°
 *Ceiling cut-out hole: Dia.100mm
 *Available ceiling board: t5~25mm
 *Remote LED driver is required.

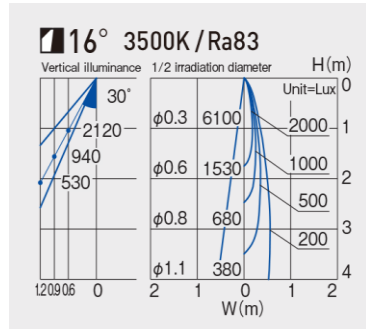

Feature


Light distribution control by optical lens

Effective heat sink even with miniaturization of 65% compared with conventional products


Even a small diameter, it is able to 35° tilting by design of shifting an axis point.

Complete waterproof performance with original gasket.

The seven-layer finished cone for outdoor is excellent in weather resistance. Our glareless cone is the same level as automobile parts realizes high quality light even under harsh environments.

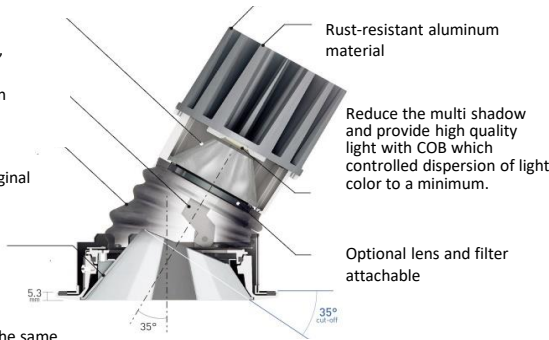

Coverless bottom
 By providing the protective glass at inside, there is no cover on the bottom surface of the fixture, it will not be fogged due to the influence of the temperature environment and dirt on aging can be suppressed.

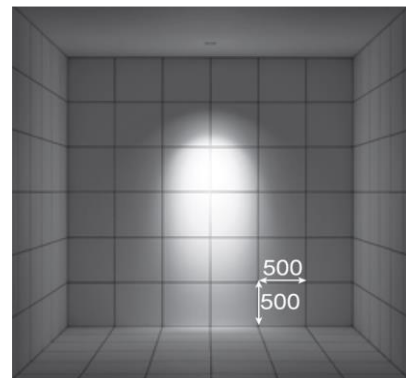

Luminaire position:
 900mm from wall, CH3000

Accessories

	Wide diffusion lens LZA-92557		Spread lens LZA-90571		Coldtone filter LZA-90574
	Honeycomb louver LZA-92953		Flood lens LZA-90572		Warmtone filter LZA-90573