


Luminaire Type : Adjustable Downlight

Model Code : LLD-7087AUW
LLD-7087AUW
LLD-7087AUW



Technical Data


Dimension	: D.115/H.153mm
Weight	: 1.0 Kg
Light source	: LED
Wattage	: 13.7W
Lumen	: 810Lm(3500K)/760Lm(2700K) 790Lm(3000K)
Color temperature	: 3500 K
Beam angle	: 22 °
CRI	: 83
Protection Class(IP)	: IP44

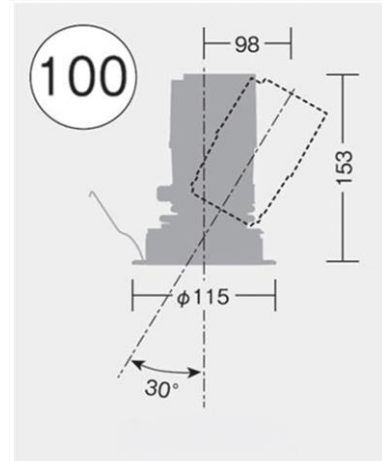

Component & Information

Aluminum die-casting trim, marine-grade painting with stainless color
Aluminum die-casting heatsink, Stainless steel fixture
Silicon accordion black gasket, Plastic cone chrome plating
Optical control lens, Tempered glass cover, clear

- *Glare cut-off angle: 35°
- *Ceiling cut-out hole: Dia.100mm
- *Available ceiling board: t5~25mm
- *Remote LED driver is required.

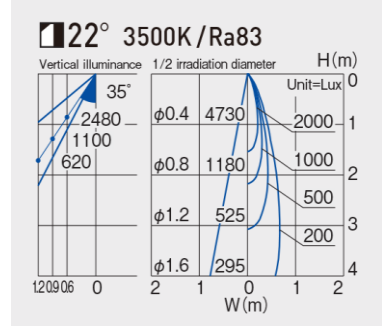

Feature


Light distribution control by optical lens

Effective heat sink even with miniaturization of 65% compared with conventional products

Even a small diameter, it is able to 35° tilting by design of shifting an axis point.

Complete waterproof performance with original gasket.

The seven-layer finished cone for outdoor is excellent in weather resistance. Our glareless cone is the same level as automobile parts realizes high quality light even under harsh environments.

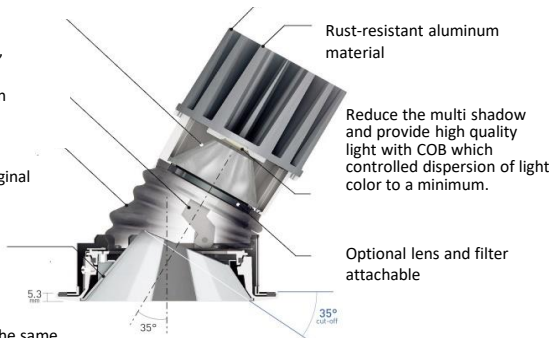


Rust-resistant aluminum material

Reduce the multi shadow and provide high quality light with COB which controlled dispersion of light color to a minimum.

Optional lens and filter attachable

Coverless bottom

By providing the protective glass at inside, there is no cover on the bottom surface of the fixture, it will not be fogged due to the influence of the temperature environment and dirt on aging can be suppressed.

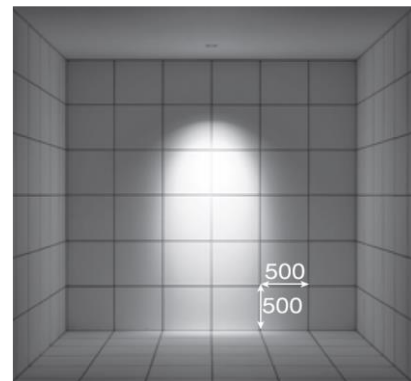

Luminaire position:
900mm from wall, CH3000

Accessories

	Wide diffusion lens LZA-92557		Spread lens LZA-90571		Coldtone filter LZA-90574
	Honeycomb louver LZA-92953		Flood lens LZA-90572		Warmtone filter LZA-90573