

Specification Sheet



Luminaire Type : Ground light


Model Code **LLG-7133LUW** 2700K
 LLG-7133YUW 3000K



Technical Data

Dimension : W.240/L.290/H.170mm
Weight : 5.0 Kg
Light source : LED
Wattage : 9.5 W
Lumen, Color temp. : 800Lm(2700K)/830Lm(3000K)

Beam angle : 25 °
CRI : 83
Protection Class(IP) : IP67



Component & Information




Stainless steel housing, marine-grade black color painting
 Aluminum reflector cone, chemical polishing
 Stainless steel trim, hairline finish, Tempered glass cover, clear
 Aluminum die-casting inner luminaire, with optical control lens

- *Internal LED driver for 100~242V, Non-dimmable
- *Two optional accessories can be used together.
- *Non-slip processing of glass is available by custom order.
- *Do not use in places to load such as vehicles.
- *Do construction work on drainage treatment.

Feature

The inner luminaire is adjustable 20mm slide and 30° tilting even after installation.

The surface temperature of the glass is set lower than 50 ° below the conventional temperature. It is safe if people touch it.

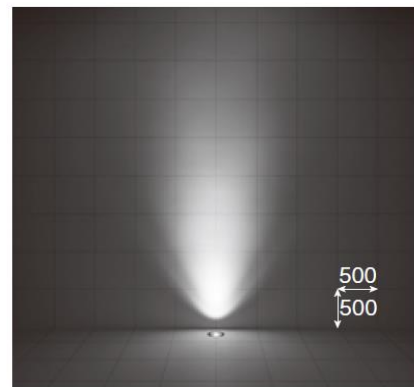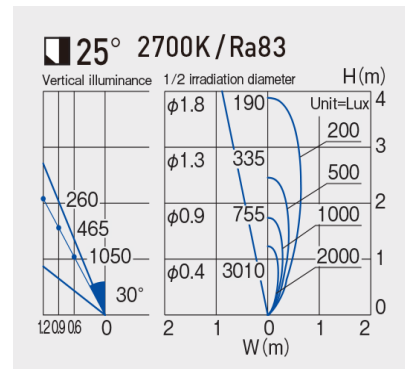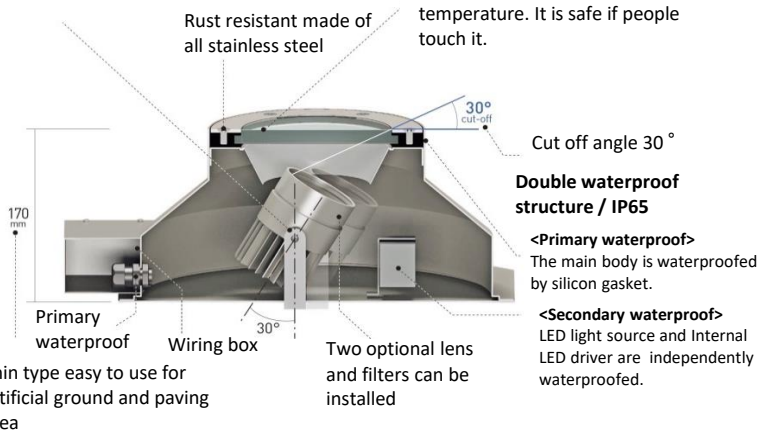

Luminaire position: 200mm from wall

Accessories



Wide diffusion lens
LZA-92557



Spread lens
LZA-90571



Coldtone filter
LZA-90574



Honeycomb louver
LZA-92953



Flood lens
LZA-90572



Warmtone filter
LZA-90573



Light shield plate
LLA-7135U