

Specification Sheet




Luminaire Type : Bollard light

Model Code **LLP-7017WUE** 5000K
 LLP-7017LUE 2700K
 LLA-7009U Recessed pole H300



■ Technical Data

Dimension : D.90/H.320mm
Weight : 1.9kg
Light source : LED
Wattage : 8.0 W
Lumen, Color temp. : 610Lm(5000K)/550Lm(2700K)
CRI : 83
Protection Class(IP) : IP65

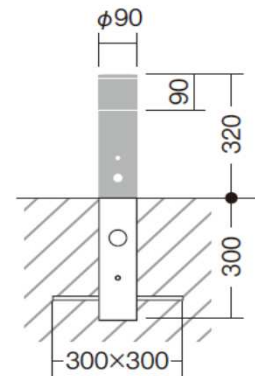

■ Component & Information

Aluminum die-casting luminaire body, Aluminum extrusion tube pole
 marine-grade painting with stainless color
 Clear solid acrylic cylinder, hollow inner frosted
 *Internal LED driver for 100~242V, Non-dimmable
 *Ground recessed mounting pole.

■ Feature

Beautiful low pole light of cutting solid acrylic with excellent weather resistance. It illuminates a soft light controlled light distribution from a cylindrical body assembled with high accuracy.

STANDARD POLE LIGHT (General Diffusion type)
 It efficiently diffuses light and illuminates the passage and the surrounding landscape brightly.



H320mm 5000K / CRI.83

