

# Specification Sheet



**Luminaire Type** : Bollard light

**Model Code**     **LLP-7018WUE**    5000K  
                        **LLP-7018LUE**    2700K  
                        **LLA-7009U**        Recessed pole H300




## ■ Technical Data

**Dimension** : D.90/H.280mm  
**Weight** : 1.7kg  
**Light source** : LED  
**Wattage** : 8.0 W  
**Lumen, Color temp.** : 510Lm(5000K)/460Lm(2700K)  
**CRI** : 83  
**Protection Class(IP)** : IP65

## ■ Component & Information

Aluminum die-casting luminaire body, Aluminum extrusion tube pole  
 marine-grade painting with stainless color  
 Clear solid acrylic cylinder, hollow inner frosted  
 \*Internal LED driver for 100~242V, Non-dimmable  
 \*Ground recessed mounting pole.

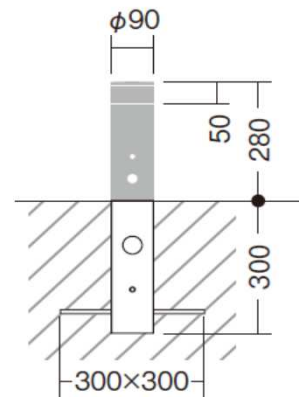

## ■ Feature

Beautiful low pole light of cutting solid acrylic with excellent weather resistance. It illuminates a soft light controlled light distribution from a cylindrical body assembled with high accuracy.

THIN LUMINAIRE POLE LIGHT (General Diffusion type)  
 Bollard with a stylish impression of thin luminaire.  
 It will guide visitors with light.



**H280mm 5000K / CRI.83**

