


Specification Sheet



Luminaire Type : Spot light (Pole top type)

Model Code	<input type="checkbox"/> LLS-7097YUM	3000K
	<input type="checkbox"/> LLA-7009U	Recessed pole H230
	<input type="checkbox"/> LLA-7010U	Recessed pole H430
	<input type="checkbox"/> LLA-7011U	Recessed pole H730
	<input type="checkbox"/> LLA-7013U	Base plate pole H230
	<input type="checkbox"/> LLA-7014U	Base plate pole H430
	<input type="checkbox"/> LLA-7015U	Base plate pole H730
	<input type="checkbox"/> LLA-7016UE	Spike pole H230

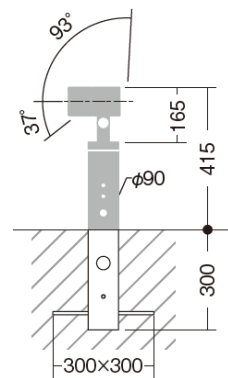

Technical Data

Dimension	: D.85/L.153/H.415mm
Weight	: 2.0 Kg
Light source	: LED
Wattage	: 16W
Lumen, Color temp.	: 790Lm(3000K)
Beam angle	: 12 °
CRI	: 83
Protection Class(IP)	: IP65

Component & Information

Aluminum die-casting body, Aluminium extrusion pole, marine-grade painting with stainless color
 Tempered glass cover clear, Optical control lens
 *Internal LED driver for 100~242V, Non-dimmable
 *Two optional accessories can be used together.

Feature

Ruggedness to withstand harsh environments, and complete straight cylinder shape to harmonize with the appearance

Double waterproof structure / IP65

*Secondary waterproof for LED and internal driver
 *Primary waterproof for main body



Two optional lens and filters can be installed

Flat surface with no water puddle even with upward lighting



Tilting angle scale



Lock function

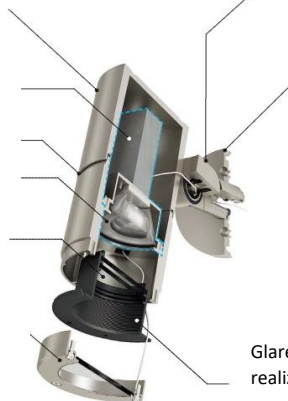

Glareless black baffle mechanism realizing 40° cut-off angle

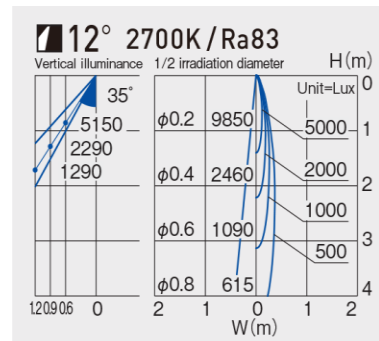

Luminaire position 900mm from wall, Tilting 35°

Accessories



Wide diffusion lens
LZA-92557



Spread lens
LZA-90571



Coldtone filter
LZA-90574



Honeycomb louver
LZA-92953



Flood lens
LZA-90572



Warmtone filter
LZA-90573



Hood
LLA-7118U