

# Specification Sheet



**Luminaire Type** : **Spot light** (Surface mounting/Flange type)

**Model Code**     **LLS-7098LUM**      2700K  
                        **LLS-7098YUM**      3000K




## ■ Technical Data

**Dimension** : D.105/L.190/H.215mm  
**Weight** : 3.0 Kg  
**Light source** : LED  
**Wattage** : 26W  
**Lumen, Color temp.** : 1410Lm(2700K)/1460Lm(3000K)

**Beam angle** : 14 °  
**CRI** : 83  
**Protection Class(IP)** : IP65

## ■ Component & Information

Aluminum die-casting body, marine-grade painting with stainless color  
 Tempered glass cover, clear  
 Optical control lens  
 \*Internal LED driver for 100~242V, Non-dimmable  
 \*Two optional accessories can be used together.



## ■ Feature

Ruggedness to withstand harsh environments, and complete straight cylinder shape to harmonize with the appearance

Double waterproof structure / IP65

\*Secondary waterproof for LED and internal driver  
 \*Primary waterproof for main body


Two optional lens and filters can be installed

Flat surface with no water puddle even with upward lighting



Tilting angle scale



Lock function

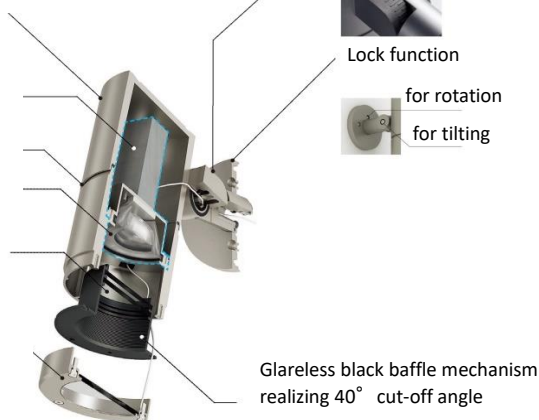

Glareless black baffle mechanism realizing 40° cut-off angle

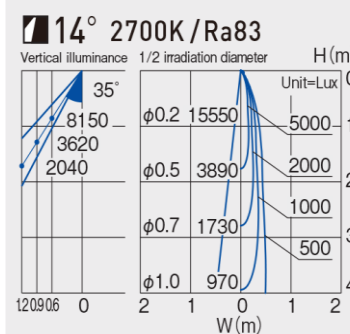

Luminaire position  
900mm from wall, Tilting 35°

## ■ Accessories



Wide diffusion lens  
**LZA-92558**



Spread lens  
**LZA-90435**



Coldtone filter  
**LZA-90439**



Honeycomb louver  
**LZA-92954**



Flood lens  
**LZA-90635**



Warmtone filter  
**LZA-90437**



Hood  
**LLA-7119U**