

# Specification Sheet



**Luminaire Type** : **Spot light** (Recessed box mounting/Flangeless type)


**Model Code**     **LLS-7099LUM**      2700K  
                           **LLS-7099YUM**      3000K



## ■ Technical Data

**Dimension** : D.105/L.190/H.198mm  
**Weight** : 3.0 Kg  
**Light source** : LED  
**Wattage** : 26W  
**Lumen, Color temp.** : 1410Lm(2700K)/1460Lm(3000K)

**Beam angle** : 14 °  
**CRI** : 83  
**Protection Class(IP)** : IP65

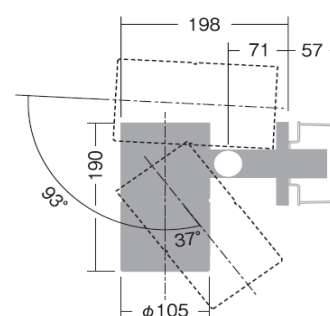

## ■ Component & Information

Aluminum die-casting, marine-grade painting with stainless color

Tempered glass cover, clear

Optical control lens

\*Internal LED driver for 100~242V, Non-dimmable

\*Two optional accessories can be used together.

\*Require recessed mounting box.

## ■ Feature

Ruggedness to withstand harsh environments, and Complete straight cylinder shape to harmonize with the appearance

Double waterproof structure / IP65

\*Secondary waterproof for LED and internal driver

\*Primary waterproof for main body

Two optional lens and filters can be installed

Flat surface with no water puddle even with upward lighting

Tilting angle scale



Lock function



for rotation

for tilting

safety wire

Recessed mounting box (separately)

Glareless baffle for 40° cut-off angle

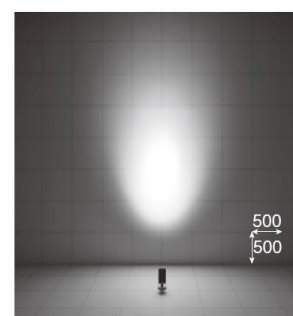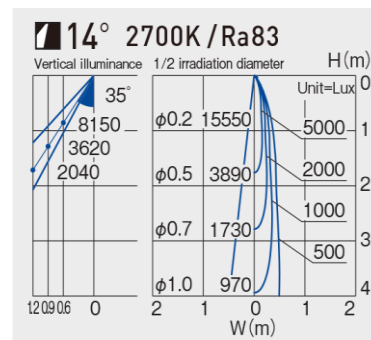

Luminaire position 900mm from wall, Tilting 35°

## ■ Accessories



Wide diffusion lens  
**LZA-92558**



Spread lens  
**LZA-90435**



Coldtone filter  
**LZA-90439**



Honeycomb louver  
**LZA-92954**



Flood lens  
**LZA-90635**



Warmtone filter  
**LZA-90437**



Hood  
**LLA-7119U**