

Specification Sheet



Luminaire Type : Spot light (Spike mounting/Flangeless type)

Model Code **LLS-7105LUM** 2700K
 LLS-7105YUM 3000K

■ Technical Data

Dimension : D.105/L.216/H.486mm
Weight : 3.6 Kg
Light source : LED
Wattage : 38W
Lumen, Color temp. : 2820Lm(2700K)/2910Lm(3000K)

Beam angle : 17°
CRI : 83
Protection Class(IP) : IP65

■ Component & Information

Aluminum die-casting, marine-grade painting with stainless color
 Stainless steel spike, marine-grade painting with stainless color
 Tempered glass cover, clear
 Optical control lens
 *Internal LED driver for 100~242V, Non-dimmable
 *Two optional accessories can be used together.
 *C/w. 2-core cabtyre cable, Black L=5m

■ Feature

Ruggedness to withstand harsh environments, and complete straight cylinder shape to harmonize with the appearance

Double waterproof structure / IP65

*Secondary waterproof for LED and internal driver
 *Primary waterproof for main body


Two optional lens and filters can be installed

Flat surface with no water puddle even with upward lighting

Tilting angle scale




Lock function





for rotation
for tilting

Glareless black baffle mechanism realizing 40° cut-off angle

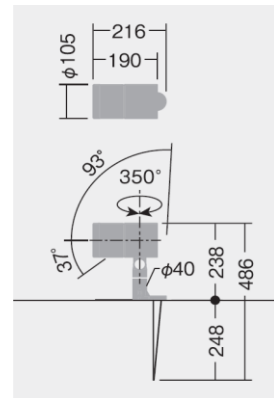

■ 17° 2700K/Ra83

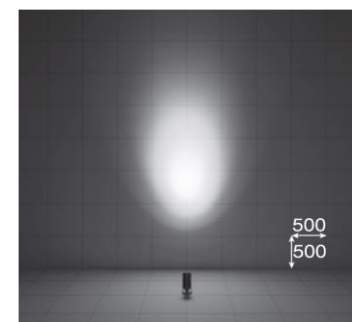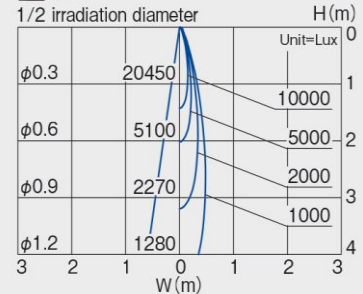

Luminaire position
900mm from wall, Tilting 35°

■ Accessories



Wide diffusion lens
LZA-92558



Spread lens
LZA-90435



Coldtone filter
LZA-90439



Honeycomb louver
LZA-92954



Flood lens
LZA-90635



Warmtone filter
LZA-90437



Hood
LLA-7119U